



Chamäleon GmbH
Rudolf-Diesel-Straße, 8a
69115 Heidelberg-Germany
Tel.: +49-(0)-6221 520440
Fax: +49-(0)-6221 520449
E-mail: info@chamaeleon-produktion.de
http://www.chamaeleon-produktion.de

TECHNICAL DATA SHEET Date of issue 22.06.2017

PAINT REMOVER

- Article number:** 26730
- Intended use:** Car refinishing Product/ Paint remover
- Area of application:** Ideal for the cleaning of old paints on many substrates.
- General information:** Highly effective paint remover. Removes old coats of paint on stone, concrete, brickwork, tarmac, metal and wood. Gel structure adheres also on vertical surfaces.
- Quality and properties:**
- Highly effective spray for the removing of old paintings
 - Gel structure
 - Thorough and quick
 - Economical proportioning
 - Easy to use
 - For wood, glass, brickwork, clinker, stone, concrete, asphalt and metal
- Physical and chemical data:**
- **Colour:** white/transparent
 - **Smell:** solvent
 - **Efficiency:** very good
 - **Substrate:** wood, glass, brickwork, clinker, stone, concrete, tarmac, metal
 - **Storage:** 10 years if appropriate storage provided
 - **Size:** Aerosol cans, maximum nominal volume 400 ml
 - **VOC-value:** 224,3 g
 - **Relative density at 20°C:** 1,25 g/ml
 - **Yield:** 1,5 g/sec
 - **Vapour pressure at 20°C:** 3 - 4 bar
 - **Coverage:** approx. 0,8 m²

Using instructions:

Before use, carefully read and observe the warning texts on the label!




Chamäleon GmbH
Rudolf-Diesel-Straße, 8a
69115 Heidelberg-Germany
Tel.: +49-(0)-6221 520440
Fax: +49-(0)-6221 520449
E-mail: info@chamaeleon-produktion.de
<http://www.chamaeleon-produktion.de>

Instructions:

- Bring can to room temperature.
- Operating temperature 5° to 30° C.
- Shake for 2 minutes before use.
- Before use, test the compatibility of the surface.
- Apply Paint Remover generously and allow to take effect.
- Residence time approx. 15 min (depends on the quality and the age of the removing paint).
- Then remove with an appropriate tool. When required, repeat the treatment.
- Contaminated Paint Remover should be regarded as chemical waste

For professional use only

Wear an appropriate respirator (A2/P3 recommended)

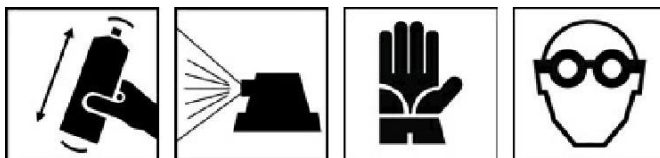

2 min

Environment and labelling:

Environmentally sound:

The product is 100% free of heavy metals.

The caps and packagings are made of recyclable material.

Disposal:

Only the completely emptied cans should be put into the recycling skip or appropriate container for reclaimable refuse. Cans which are not empty should be disposed off as "special refuse".

Marking/Labelling:

Product complies with the actual labelling regulations according to Preparation Guideline 1999/45/EG. Aerosol corresponds to TRGS 200 and TRG 300 as well as to aerosol guideline 75/324/EWG in the actually valid version.

Data: 22, June 2017

This release replaces all eventually earlier issued versions.

For the additional information that is not included to the Technical Data Sheet apply to the supplier: e-mail: info@chamaeleon-produktion.de

See information on safety in Safety Data Sheet.